


1/2" ANCHOR, 4X  
(ANCHORS/HARDWARE &  
CHEMICAL ADHESIVE BY OTHERS)

1. MATCH DRILL ANCHORS AFTER  
FINAL PLACEMENT OF  
UNIT IS DETERMINED


2. ANCHOR SIZE, EMBEDMENT,  
AND FASTENING METHOD  
MAY REQUIRE MODIFICATION  
DEPENDING ON SEISMIC  
REQUIREMENTS.

3. FOLLOW ANCHOR MANUFACTURERS  
GUIDELINES FOR SPECIFIC  
INSTALLATION REQUIREMENTS  
INCLUDING ANCHOR EMBEDMENT  
AND EDGE DISTANCE. UNLESS  
OTHERWISE SPECIFIED BY ENGINEERING  
CONTRACT DRAWINGS, ALL ANCHOR  
BOLTS SHOWN SHALL UTILIZE EPCON  
C6 (ITW RAMSET/REDHEAD) EPOXY  
ADHESIVE ANCHORING SYSTEM. ICC ER-4285


4. ALL ANCHORS AND FASTENERS TO BE STAINLESS  
STEEL. APPLY ANTI-SEIZE TO ALL CONNECTIONS.




**SECTION B-B  
ANCHOR DETAIL**

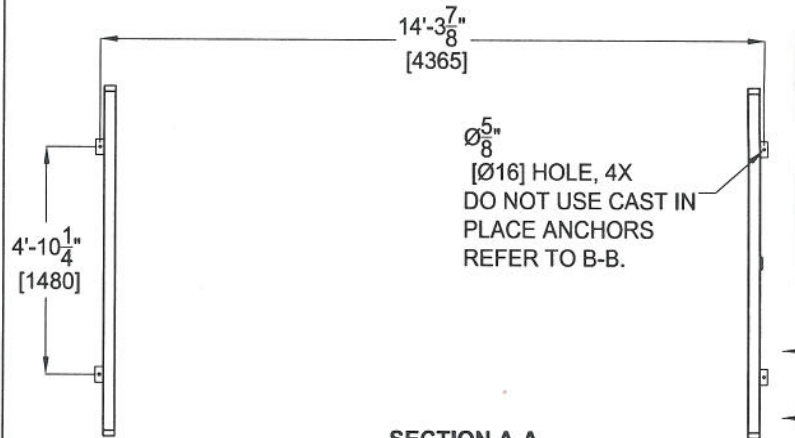


**SECTION A-A**

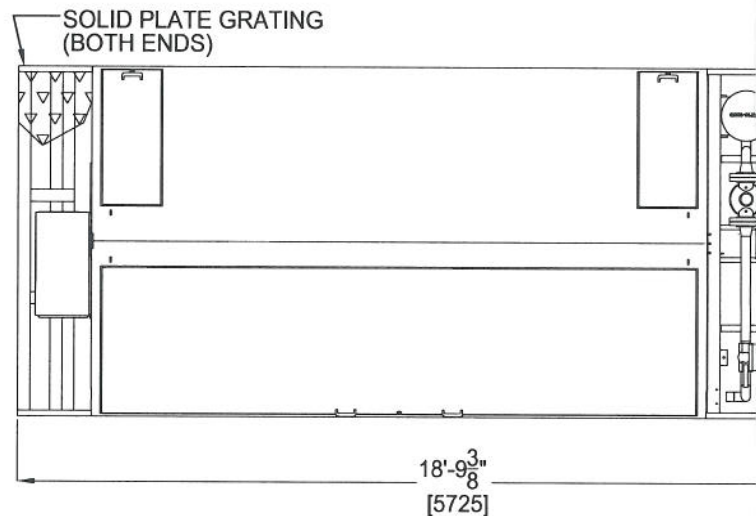

**TOP VIEW**

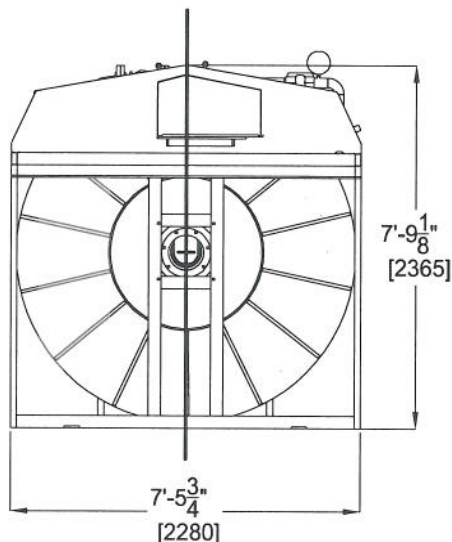

**REAR SIDE VIEW**

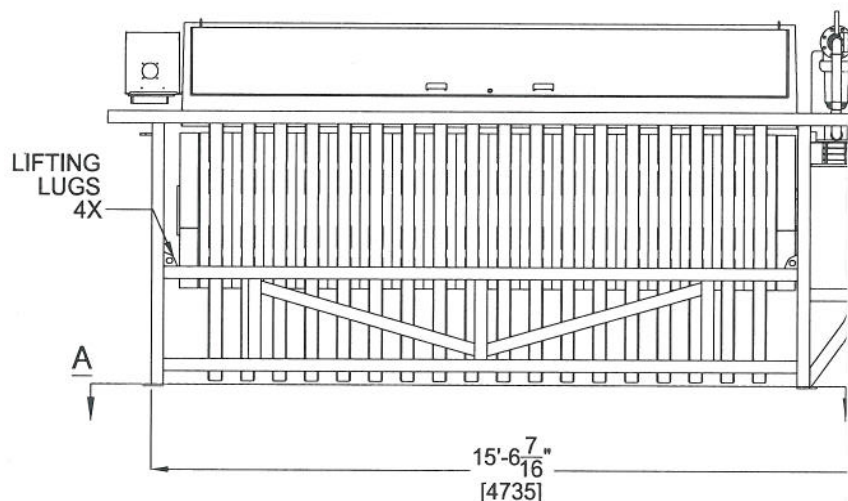

**SIDE VIEW**

ALL INFORMATION CONTAINED ON THIS DOCUMENT IS THE PROPERTY OF THE DESIGNER. IT IS THE PROPERTY OF THE DESIGNER AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF THE DESIGNER. THE DESIGNER ASSUMES NO LIABILITY FOR THE USE OF THIS DOCUMENT OR THE DESIGN HEREIN FOR ANY OTHER PROJECT OR IN A MANNER THAT DOES NOT CONFORM TO THE INTENT OF THE DESIGN. IN NO EVENT SHALL THIS DOCUMENT OR THE DESIGN HEREIN BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE DESIGNER. THE ACCEPTANCE OF THE DELIVERY OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THE DESIGNER'S LIABILITY FOR THE USE OF THIS DOCUMENT OR THE DESIGN HEREIN FOR ANY OTHER PROJECT OR IN A MANNER THAT DOES NOT CONFORM TO THE INTENT OF THE DESIGN.

REV	DESCRIPTION	DRAWN	APPR	DATE
1	CHANGED BORDER & ANCHOR NOTES	CDP	CTG	05.18.09
0	PRELIMINARY RELEASE	CDP	CTG	09.25.07